





# LED Vector Flood Light

Part Number	FLV50050	FLV50100	FLV50200
Description	LED Flood Light - 50W 225*297.5 (5,000K)	LED Flood Light - 100W 298*338 (5,000K)	LED Flood Light - 200W 375*420 (5,000K)
Nominal Power	50W	100W	200 W
Nominal Lumens	6,250LM	12,500LM	25,800LM
Nominal Efficacy	125LM/W	125LM/W	129LM/W
CRI	Ra>80	Ra>80	Ra>80
CCT	5,000K	5,000K	5,000K
Beam Angle	107°	108°	110°
Dimensions (MM) / Weight (G)	225 X 297.5 X 64.9 / 1,990	298 X 338 X 64.9 / 3,350	375 X 420 X 64.9 / 5,520
Working Temperature	-40°C – 50°C	-40°C – 50°C	-40°C – 50°C
Expected Life Time	50,000 Hours	50,000 Hours	50,000 Hours
Warranty	5 Year	5 Year	5 Year
IP Rating	IP65	IP65	IP65

## C Plane Distribution Diagram

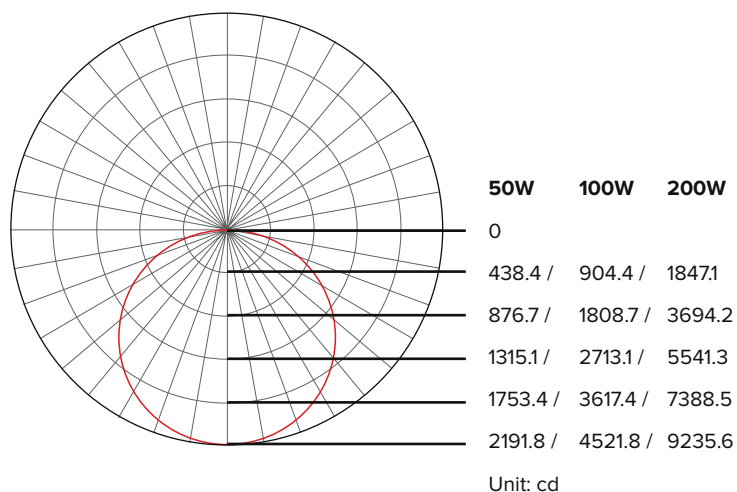

## Illumination - Distance Curve

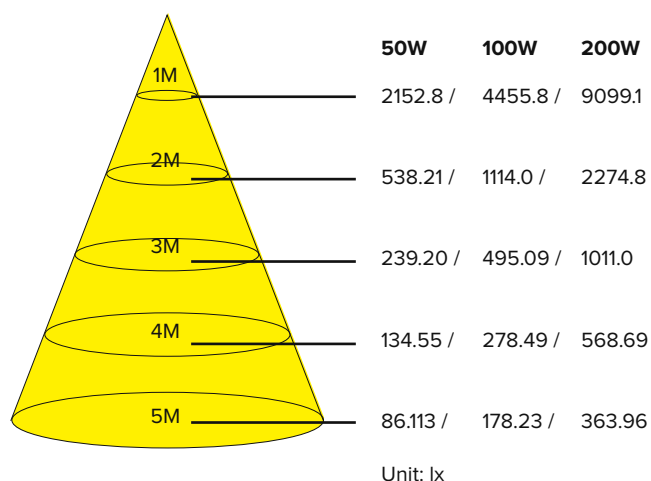

13LEDS ( 13 53 37 )  
[www.LEDified.com.au](http://www.LEDified.com.au)  
 LEDified Lighting Corporation Pty Ltd